



## Applications

Fastening joist hangers, seismic and hurricane ties, rafter ties, post bases and caps, foundation anchors, and other metal framing hardware.

## Features & Benefits


- Nosepiece probe locates metal connector holes, providing accurate nail placement
- Lightweight and well-balanced
- Dry-fire lockout
- Powerful enough to drive through engineered lumber
- Tool-free adjustable depth-of-drive
- Adjustable rafter hanger
- Tool-Free adjustable exhaust deflector

## Metal connector nailer

### Technical specifications

Dimension (LxWxH)	350x110x359 mm
Net weight	2,68 kg
Firing mode	Restrictive
Air inlet	3/8" female NPT
Operating pressure	4,8 - 8,3 bar
Air consumption (at 60 shots per minute)	117,5 l/m
Operating temperature range	-18 - 49 °C
Sound pressure level (Lpa)	90 dB
Sound power level (Lwa)	103 dB
Vibration level	3,56 m/s <sup>2</sup>
Magazine capacity	20 pieces
Collation type 1	Plastic collated
Collation type 2	Paper collated
Collation angle	34 °

### Fastener specification

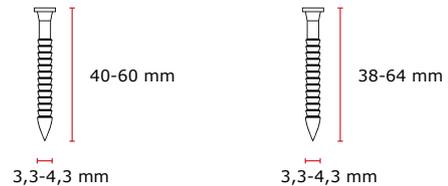

### Description

MC60-34, metal connector nailer

### Art. Nr.

6K2001N

### EAN code

0741474115912